


# Standard Hex-Hut Set Up T12, T24 & T48

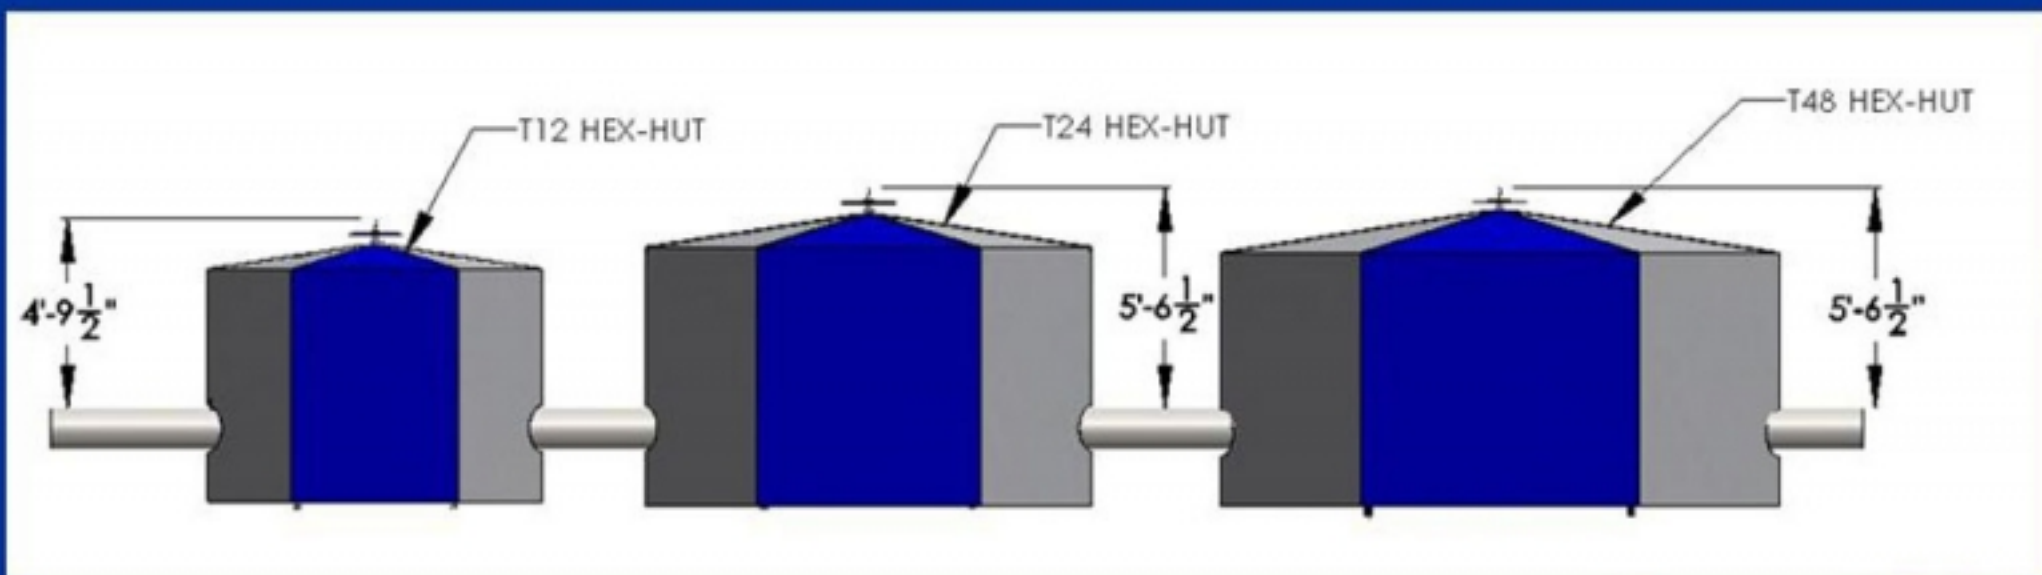

TWO PEOPLE ARE REQUIRED TO SET UP ALL SHELTER SYSTEMS!


## **Standard HEX-HUT Parts List**

- **Large Bag: Roof Section**
- **Small Bag: 6 Wall Panels**
- **Urethane Rain Hood**
- **Steel Cleat**
- **Aluminum Angle Boom Arm**
- **Adjustable Steel Stays (x4)**

1. MOUNT CLEAT 1.0m FROM WELD SITE USING CHAINS AND LOAD BINDERS OR 2" RATCHET STRAPS





2. INSERT ALUMINIUM ANGLE BOOM ARM INTO  
CLEAT. SECURE WITH ATTACHED PIN

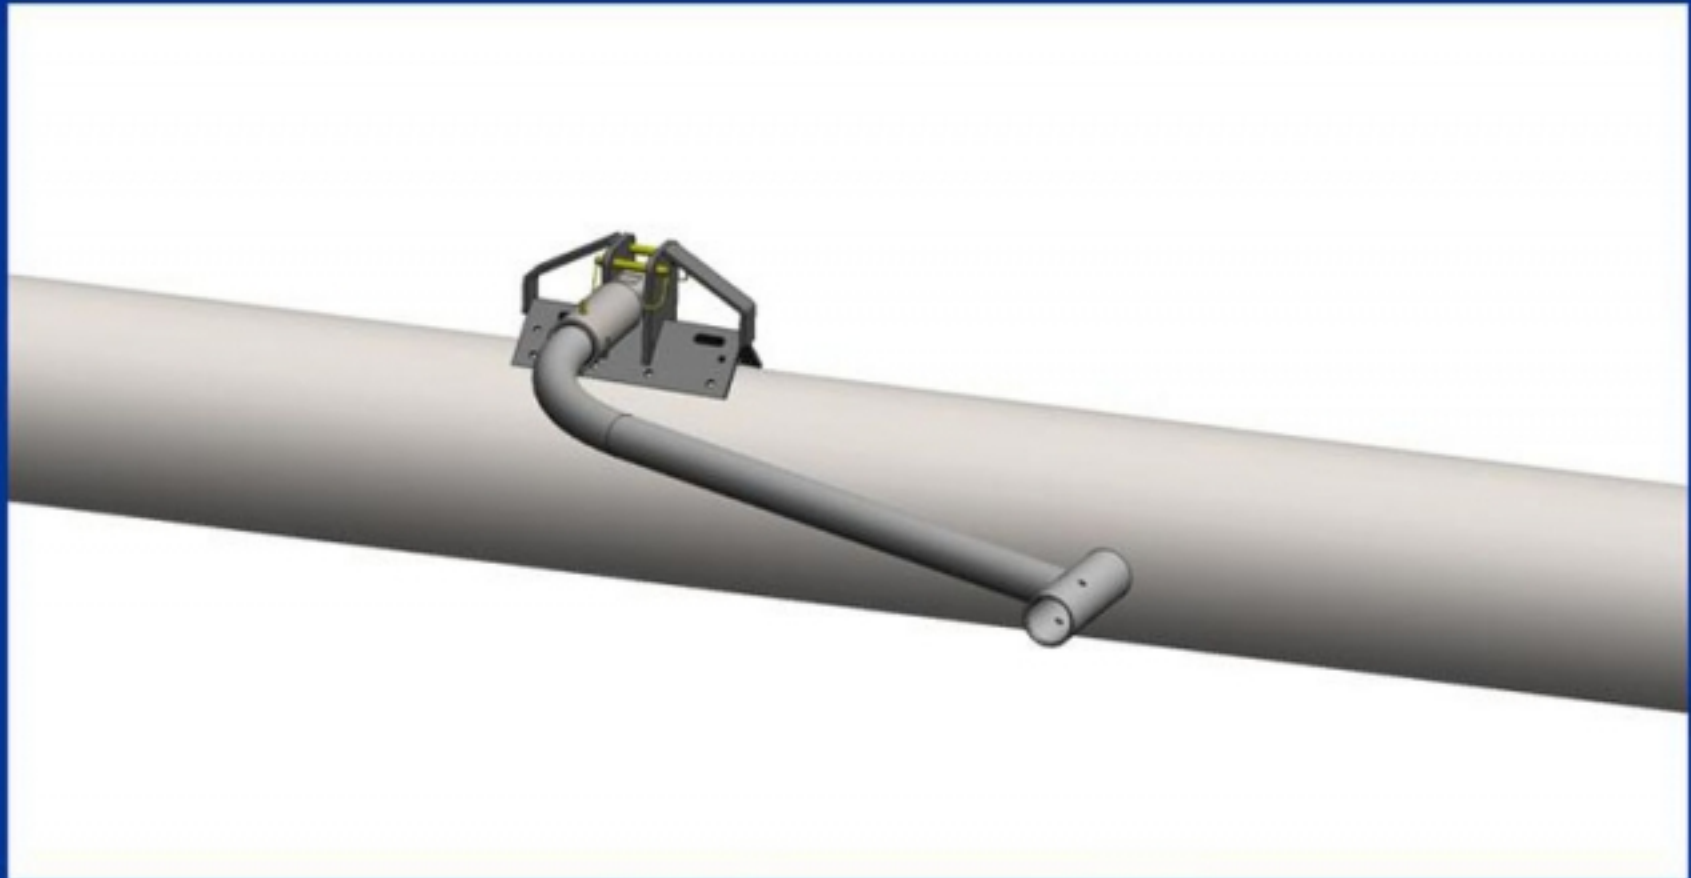



3. INSERT URETHANE RAIN HOOD INTO ROOF SECTION, ATTACH WITH PIN
4. OPEN ROOF SECTION UPSIDE DOWN ON THE GROUND, SECURE WITH PIN
5. INSERT TENSION HOOKS INTO TRUSSES

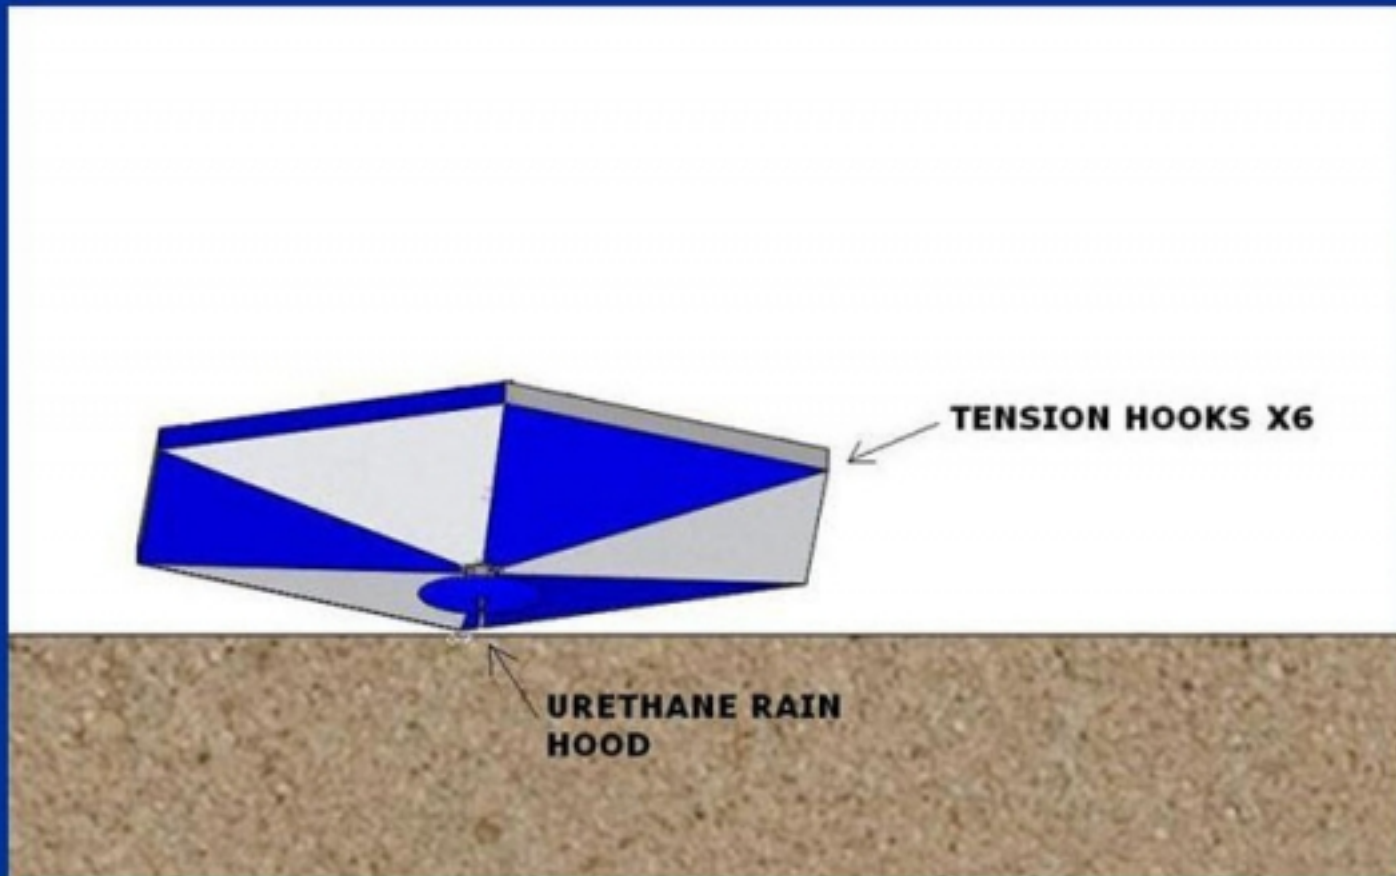

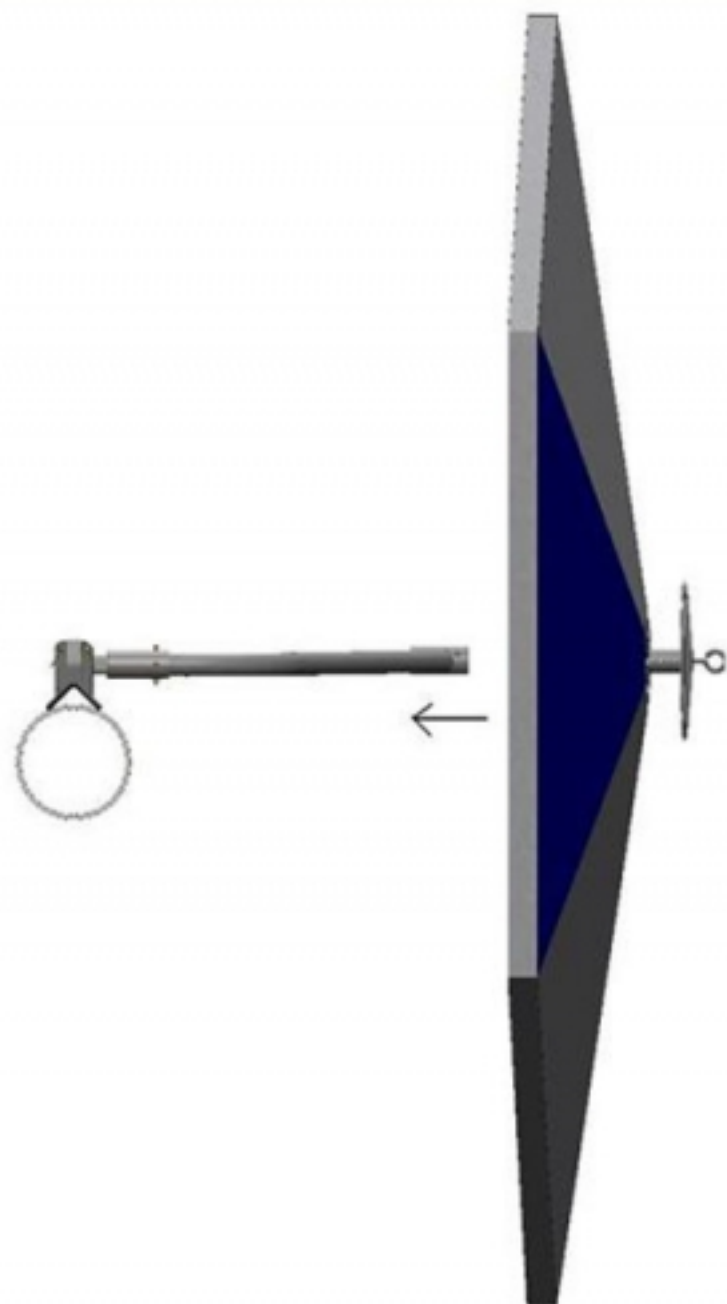


6. INSERT ROOF  
SECTION INTO  
ALUMINUM ANGLE  
BOOM, SECURE WITH  
PIN




7. MOVE THE ROOF SECTION TO THE UPRIGHT POSITION (2 people are recommended)
8. SECURE WITH  $\frac{1}{2}$ " PIN ON STEEL CLEAT



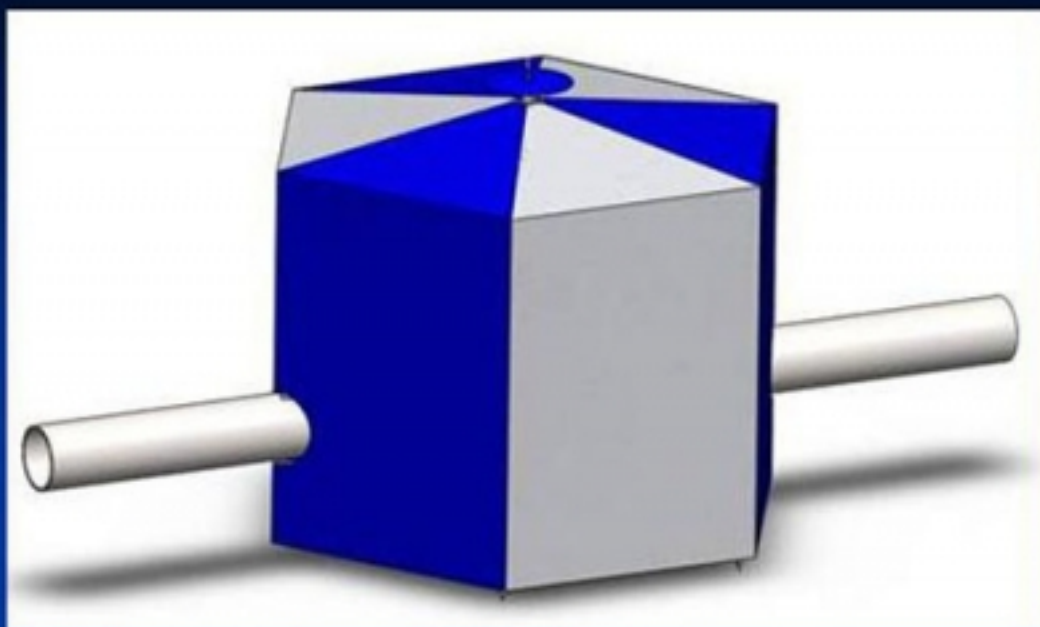

9. ATTACH WALL TARPS #1 THROUGH #6 WITH THE CORRESPONDING NUMBERS ON THE ROOF TARP
10. HANG WALL STAYS ON THE HOOKS PROVIDED INSIDE THE SHELTER, SECURE TO WIRE WITH SNAP CLIPS



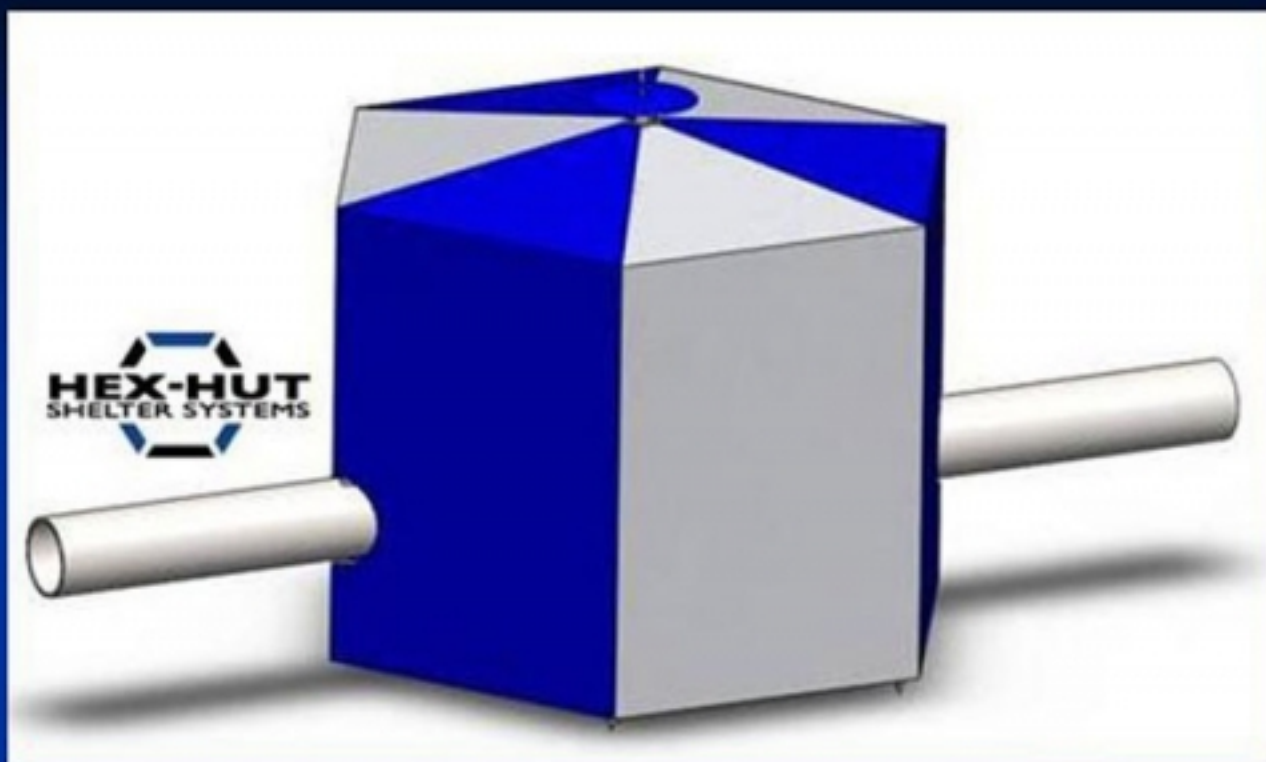

Your Hex-Hut Shelter System is ready for use.  
If you have any questions or concerns regarding  
set-up please contact:

Pam Gross  
403-293-7333  
Cell 403-836-2583  
[pam@hex-hut.com](mailto:pam@hex-hut.com)